




# CÔNG TY CHIẾU SÁNG ĐÔ THỊ MIỀN NAM



Chiếu sáng mọi nẻo đường



CÔNG TY CHIẾU SÁNG ĐÔ THỊ MIỀN NAM


# *Street lights*

Multiple Color Choice Different  
Environment Lighting.







Philips L31




Power:	50-320W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	5000-41600lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / OSRAM
Control gear:	Meanwell / Philips / Invention
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65
Dimension:	100w.L492 x W210 x H86 150.L492 x W295 x H86 200w.L870 x W295 x H86


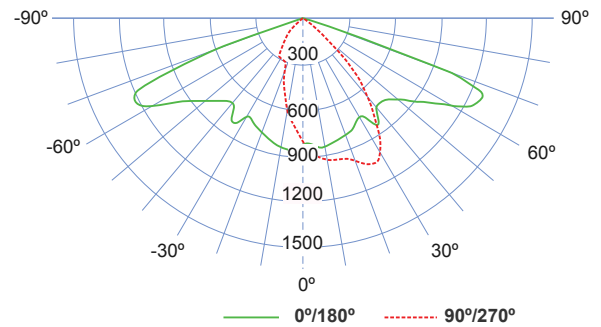
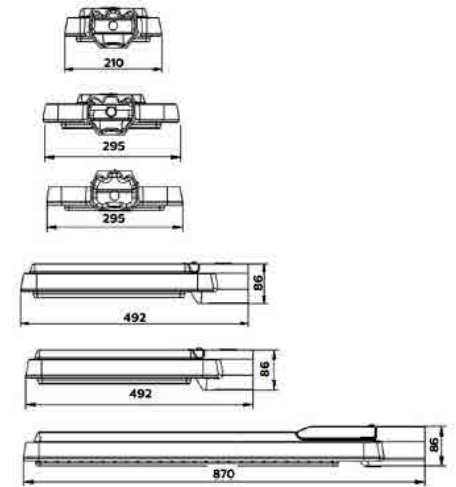




Philips L30




**Power:** 30-300W  
**Mains voltage:** 220-240V / 50-60Hz  
**Power Factor:** >0.9  
**Luminous flux:** 3000-39000lm  
**Luminaire efficacy:** 100-130lm/W  
**CCT:** 2700-6000K  
**CRI:** > 80  
**Beam Angle:** 60 / 120 / 45x120 / 60x120°  
**Light Source:** Cree / Philips / Bridgelux / Epistar  
**Control gear:** Meanwell / Philips / Done  
**Dimming:** Dali / 5 steps / 0-10V  
**IP rating:** IP65  
**Color:** Silver  
**Life time:** 50,000-100,000hrs  
**Operating Temperature:** -40 ~ +45  
**Storage Temperature:** -20 ~ +65  
**Dimension:**  
 75w .L422 x W320 x H60 x Φ60  
 100w.L522 x W320 x H60 x Φ60  
 120w.L522 x W320 x H60 x Φ60  
 150w.L600 x W320 x H60 x Φ60  
 200w.L853 x W320 x H60 x Φ60


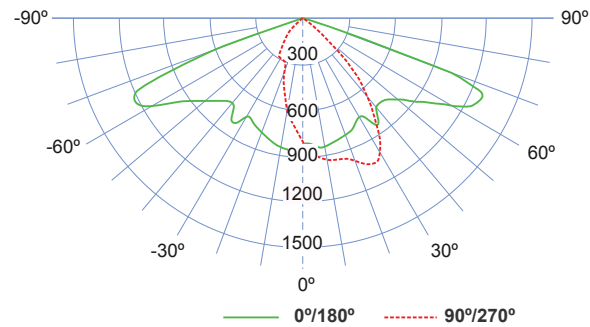
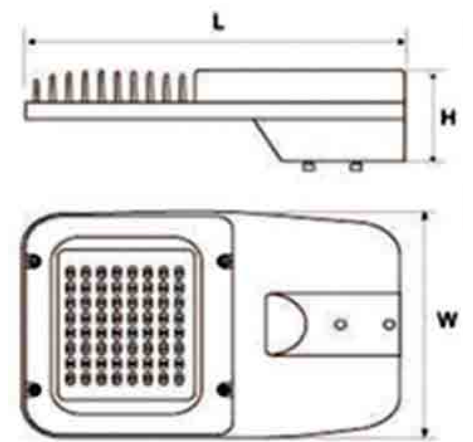




Philips L34




Power:	50-200W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	5000-32500lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 45x120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / OSRAM
Control gear:	Meanwell / Philips / Invention
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65
Dimension:	MM.L607 x W318 x H <sub>1</sub> 141 x H <sub>2</sub> 113 MM.L788 x W439 x H <sub>1</sub> 138 x H <sub>2</sub> 119

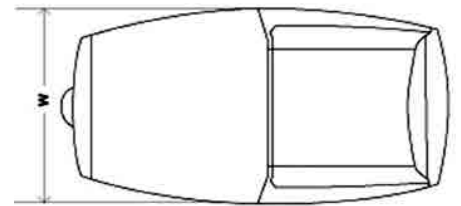
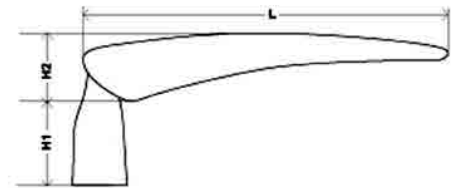




MN - L29




Power:	100-300W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	5000-32500lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 45x120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / Epistar
Control gear:	Meanwell / Philips / Done
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65
Dimension:	100w.L610 x W315 x H90 150w.L720 x W315 x H90 200w.L830 x W315 x H90 250w.L940 x W315 x H90 300w.L940 x W315 x H90

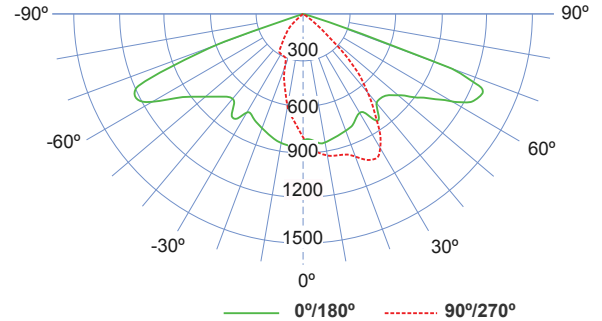





**MN - L33**



Power: 60-200W  
 Mains voltage: 220-240V / 50-60Hz  
 Power Factor: >0.9  
 Luminous flux: 6000-26000lm  
 Luminaire efficacy: 100-130lm/W  
 CCT: 2700-6000K  
 CRI: > 80  
 Beam Angle: 60 / 120 / 45x120 / 60x120°  
 Light Source: Cree / Philips / Bridgelux / OSRAM  
 Control gear: Meanwell / Philips / Invention

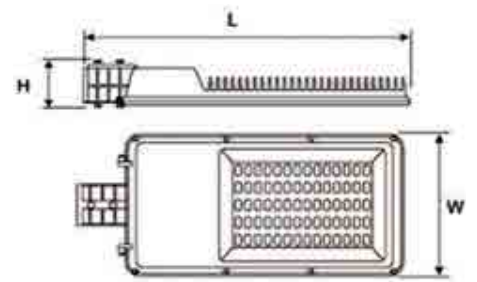

Dimming: Dali / 5 steps / 0-10V  
 IP rating: IP65  
 Color: Silver  
 Life time: 50,000-100,000hrs  
 Operating Temperature: -40 ~ +45  
 Storage Temperature: -20 ~ +65  
 Dimension:  
 60w.L480 x W215 x H65 x Φ50  
 100w.L580 x W250 x H70 x Φ60  
 150w.L690 x W300 x H72 x Φ60  
 200w.L780 x W300 x H75 x Φ60


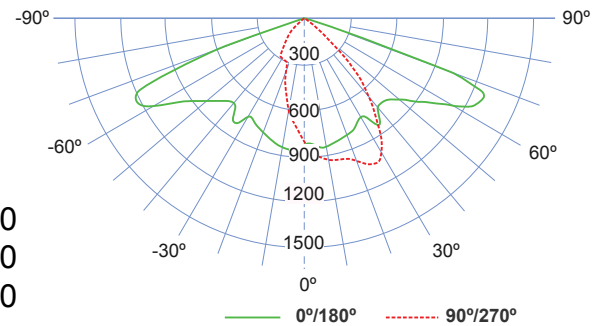




MN - L25




Power:	90-150W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	5000-32500lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 45x120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / OSRAM/ Epistar
Control gear:	Meanwell / Philips / Invention
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65
Dimension:	100w.L900 x W380 x H200 x Φ60 120w.L930 x W380 x H200 x Φ60 150w.L930 x W380 x H200 x Φ60

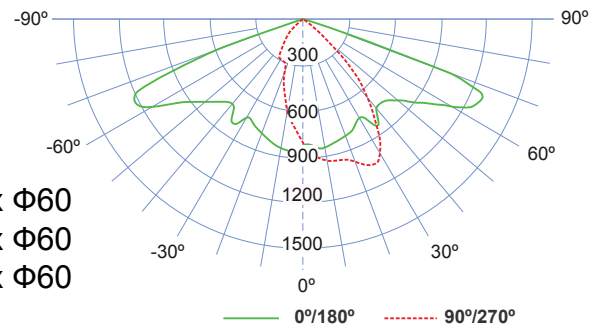






MN - L26




**Power:** 50-200W  
**Mains voltage:** 220-240V / 50-60Hz  
**Power Factor:** >0.9  
**Luminous flux:** 5000-32500lm  
**Luminaire efficacy:** 100-130lm/W  
**CCT:** 2700-6000K  
**CRI:** > 80  
**Beam Angle:** 60 / 120 / 45x120 / 60x120°  
**Light Source:** Cree / Philips / Bridgelux / OSRAM/Epistar  
**Control gear:** Meanwell / Philips / Invention,Achi,Done  
**Dimming:** Dali / 5 steps / 0-10V  
**IP rating:** IP65  
**Color:** Silver  
**Life time:** 50,000-100,000hrs  
**Operating Temperature:** -40 ~ +45  
**Storage Temperature:** -20 ~ +65  
**Dimension:**  
 50w.L500 x W200 x H70 x Φ49  
 100w.L720 x W280 x H100 x Φ60  
 120w.L900 x W360 x H100 x Φ60  
 150w.L900 x W360 x H100 x Φ60  
 200w.L960 x W360 x H75 x Φ60




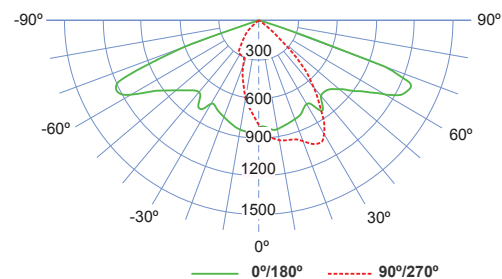





MN - L28



Power:	60-300W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	6000-39000lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 45x120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / Epistar
Control gear:	Meanwell / Philips / Done
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65
Dimension:	100w.L675 x W320 x H75 x Φ60 120w.L745 x W320 x H75 x Φ60 150w.L815 x W320 x H75 x Φ60 200w.L885 x W320 x H75 x Φ60 300w.L955 x W320 x H75 x Φ60

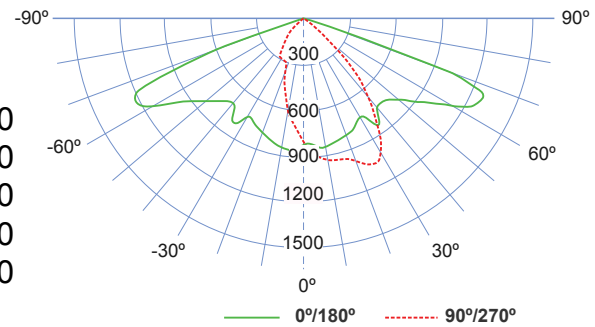
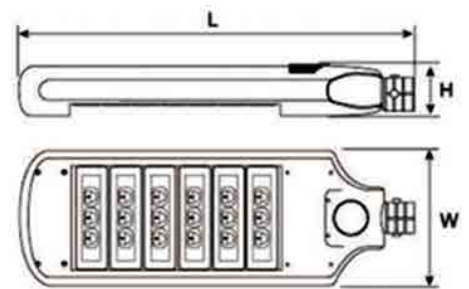


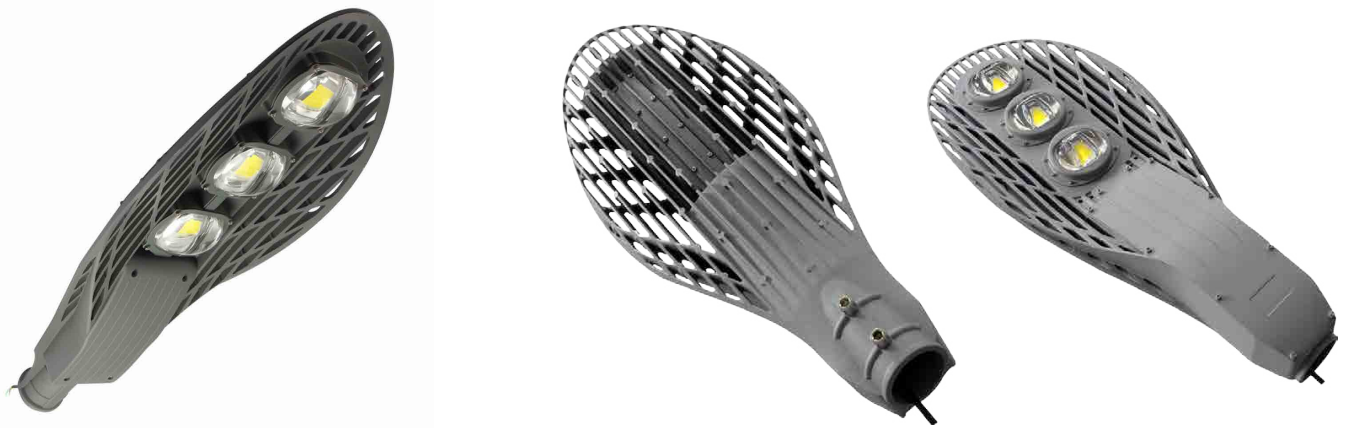

MN - L 23




Power:	50-200W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	5000-32500lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 45x120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / Epistar
Control gear:	Meanwell / Philips / DONE
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65
Dimension:	50w.L500 x W200 x H70 x Φ49 100w.L720 x W280 x H100 x Φ60 120.L900 x W360 x H100 x Φ60 150.L900 x W360 x H100 x Φ60 200.L960 x W360 x H75 x Φ60



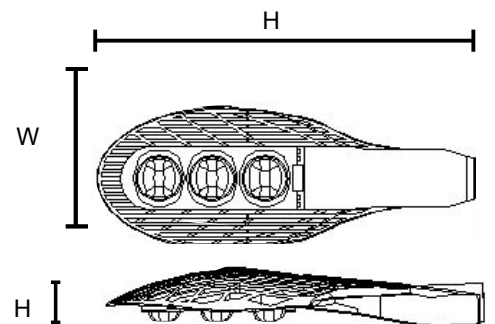




MN - L 24




Power:	100-250W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	5000-32500lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 45x120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / OSRAM / Epistar
Control gear:	Meanwell / Philips / Invention / DONE
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65




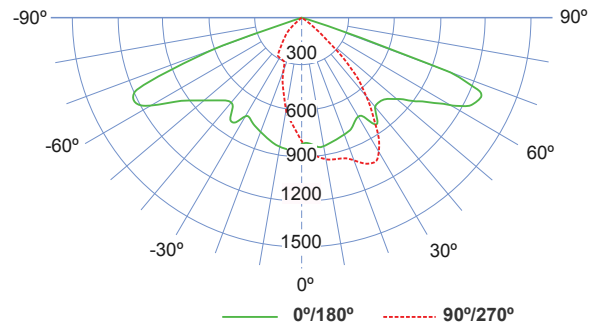





MN - L 32




**Power:** 100-250W  
**Mains voltage:** 220-240V / 50-60Hz  
**Power Factor:** >0.9  
**Luminous flux:** 5000-32500lm  
**Luminaire efficacy:** 100-130lm/W  
**CCT:** 2700-6000K  
**CRI:** > 80  
**Beam Angle:** 60 / 120 / 45x120 / 60x120°  
**Light Source:** Cree / Philips / Bridgelux / OSRAM / Epistar  
**Control gear:** Meanwell / Philips / Invention / DONE  
**Dimming:** Dali / 5 steps / 0-10V  
**IP rating:** IP65  
**Color:** Silver  
**Life time:** 50,000-100,000hrs  
**Operating Temperature:** -40 ~ +45  
**Storage Temperature:** -20 ~ +65

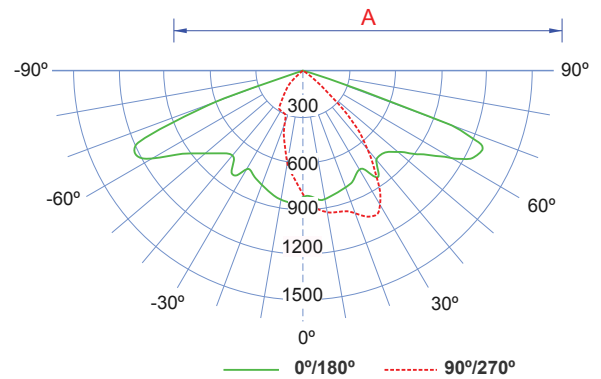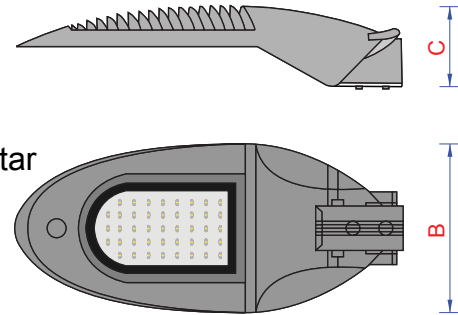



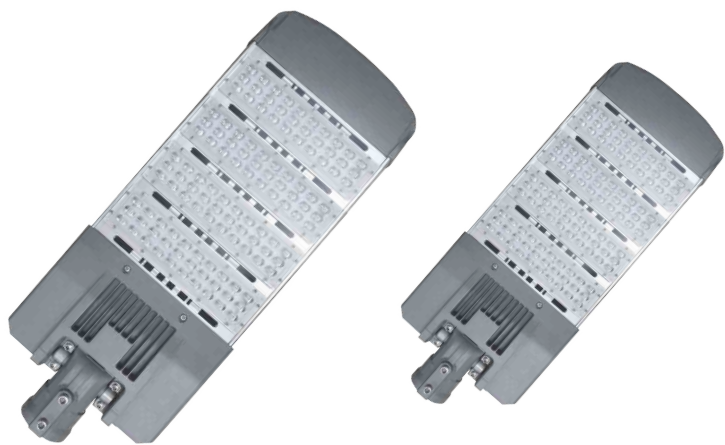



MN - L27



Power: 90-200W  
 Mains voltage: 220-240V / 50-60Hz  
 Power Factor: >0.9  
 Luminous flux: 6000-26000lm  
 Luminaire efficacy: 120-140lm/W  
 CCT: 2700-6000K  
 CRI: > 80  
 Beam Angle: 60 / 120 / 45x120 / 60x120°  
 Light Source: Philips / Bridgelux / Samsung  
 Control gear: Meanwell / Philips / Invention

Dimming: Dali / 5 steps / 0-10V  
 IP rating: IP65  
 Color: Silver  
 Life time: 50,000-100,000hrs  
 Operating Temperature: -40 ~ +45  
 Storage Temperature: -20 ~ +65  
 Dimension: L680 x W280 x H100 mm  
 L780 x W280 x H100 mm  
 L780 x W280 x H100 mm

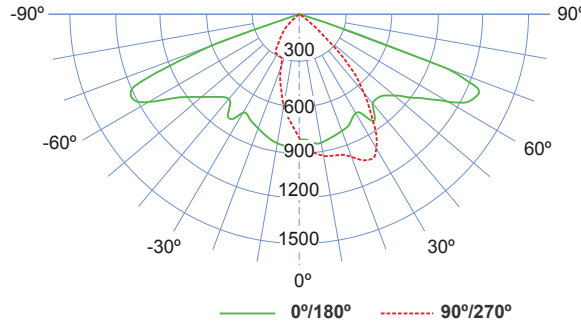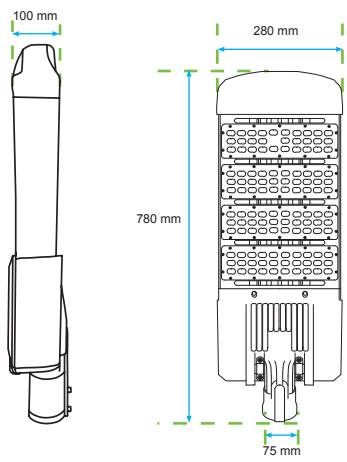

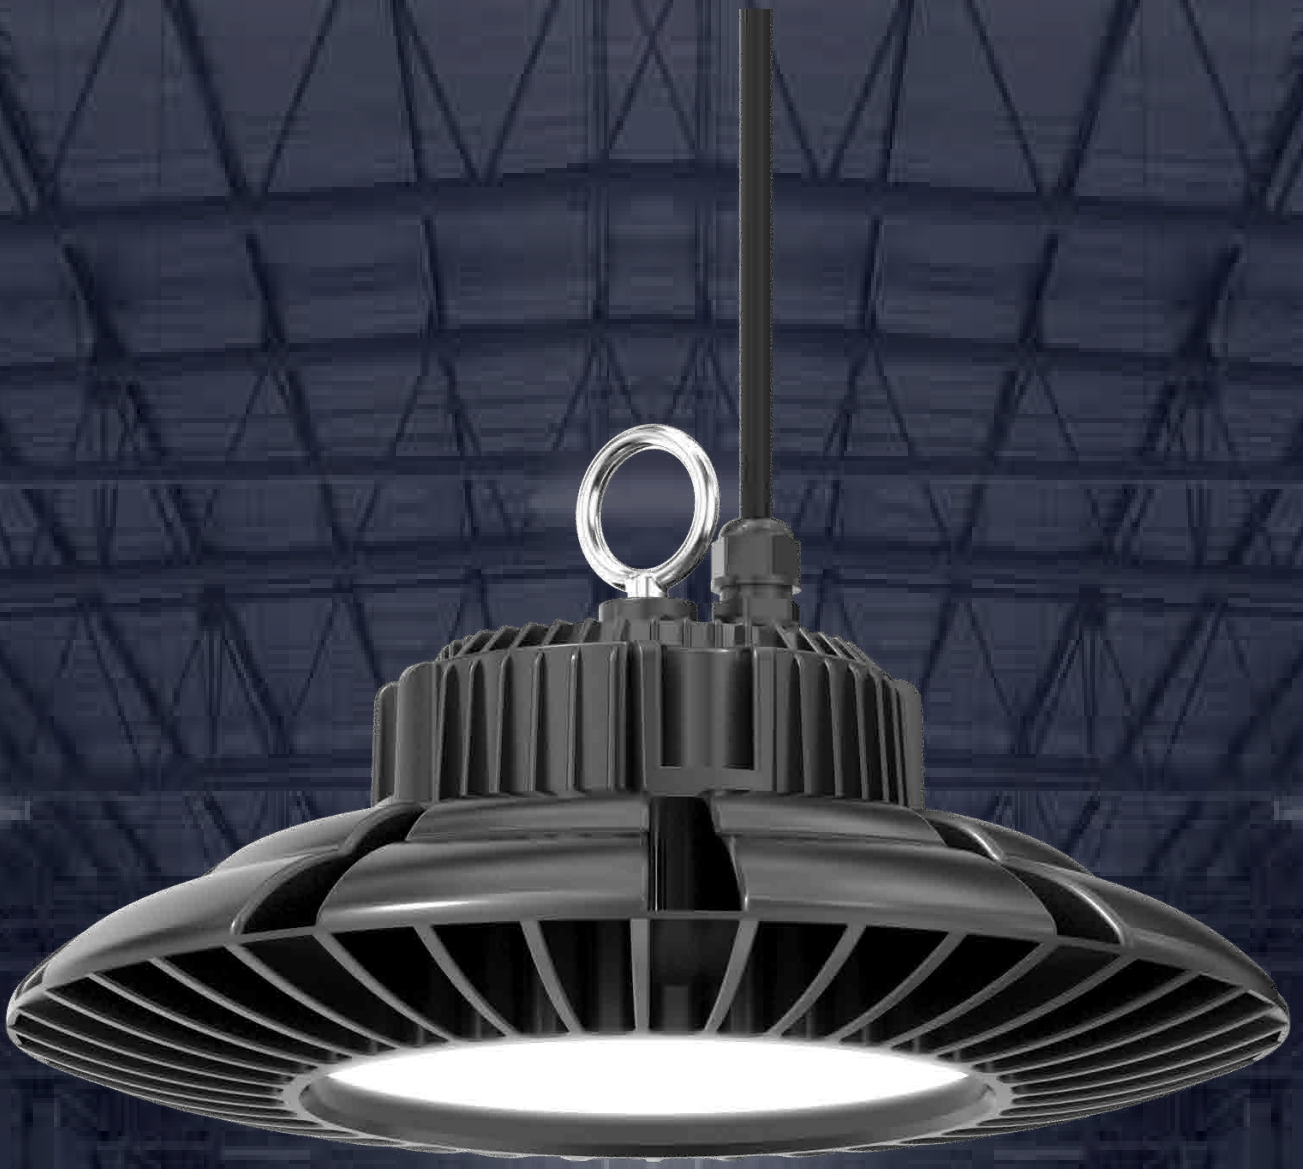


**CREE** 

**PHILIPS**






**MW**  
MEAN WELL



-FL-01




Power:	100-700W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	10000-91000lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	15 / 25 / 45 / 60 / 120°
Light Source:	Cree / Philips / Bridgelux / OSRAM
Control gear:	Meanwell / Philips / Invention
Dimming:	Dali / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65
Dimension:	MM.L390 x W270 x H195.4 MM.L463 x W323 x H396.7

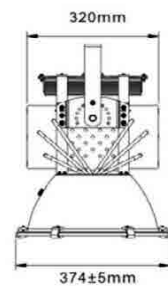








MN - PC




Power:	100-500W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	5000-41600lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / Epistar
Control gear:	Meanwell / Philips / Done
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65
Dimension:	PC100.L285 x W355 x H90 PC200.L425 x W325 x H105 PC300.L435 x W390 x H110 PC400.L460 x W430x H120 PC500.L670 x W455x H200


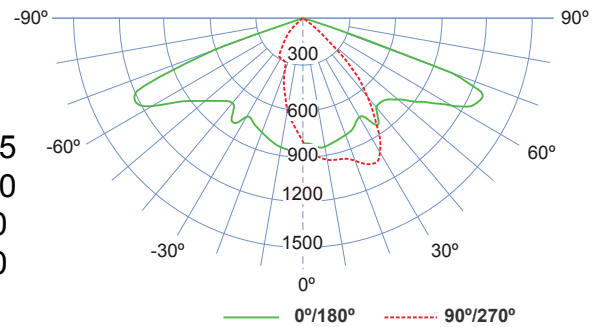




MN - PL




Power: 50-300W  
 Mains voltage: 220-240V / 50-60Hz  
 Power Factor: >0.9  
 Luminous flux: 3000-39000lm  
 Luminaire efficacy: 100-130lm/W  
 CCT: 2700-6000K  
 CRI: > 80  
 Beam Angle: 60 / 120 / 45x120 / 60x120°  
 Light Source: Cree / Philips / Bridgelux / Epistar  
 Control gear: Meanwell / Philips / Inv  
 Dimming: Dali / 5 steps / 0-10V  
 IP rating: IP65  
 Color: Silver  
 Life time: 50,000-100,000hrs  
 Operating Temperature: -40 ~ +45  
 Storage Temperature: -20 ~ +65  
 Dimension:  
 PL100.L422 x W320 x H140 x Φ60  
 PL150.L522 x W320 x H140 x Φ60  
 PL200.L600 x W320 x H140 x Φ60  
 PL250.L700 x W320 x H140 x Φ60  
 PL300.L853 x W320 x H140 x Φ60

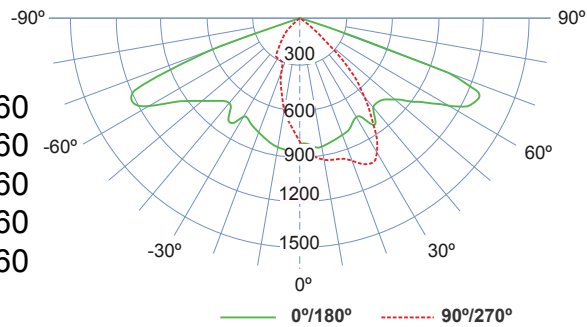




MN-PB



Power:	200-500W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	5000-32500lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 45x120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / OSRAM
Control gear:	Meanwell / Philips / Invention
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65
Dimension:	PB200.L423 x W323 xH100 PB300.L460 x W375 xH100 PB400.L583 x W400 xH100 PB500.L660 x W380 xH100







MM-CHR-02




Power:	50-200W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	5000-32500lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 45x120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / Epistar
Control gear:	Meanwell / Philips / Invention
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65
Dimension:	MM.L610 x W315 x H90 MM.L720 x W315 x H90 MM.L830 x W315 x H90


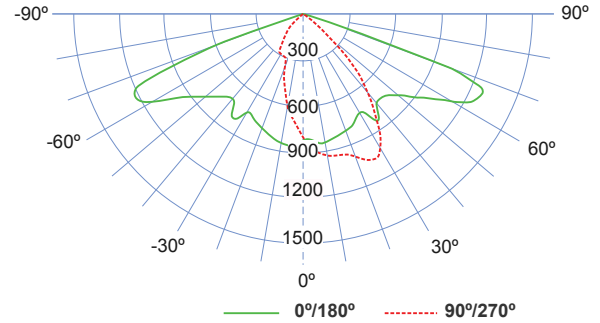




MN - BVP161




Power:	30-70W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	6000-26000lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 45x120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / Epistar
Control gear:	Meanwell / Philips / Done
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Storage Temperature:	-20 ~ +65
Dimension:	BVP30.L193 x W143 x H33 BVP50.L270 x W202 x H38 BVP70.L316 x W234 x H41


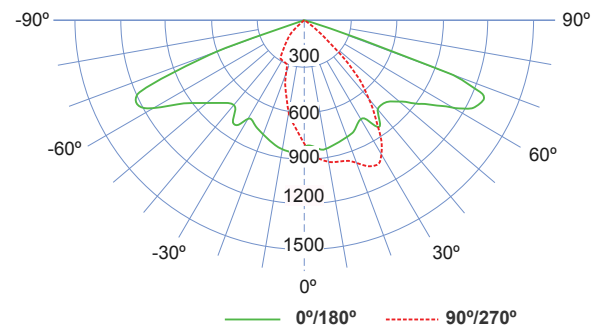




MN - PA




Power:	50-200W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	5000-32500lm
Luminaire efficacy:	100-120lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 45x120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / OSRAM/ Epistar
Control gear:	Meanwell / Philips / Invention
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65
Dimension:	PA50.L285 x W240 x H90 PA100.L285 x W285 x H100 PA150.L335 x W335 x H110 PA200.L373 x W373 x H110


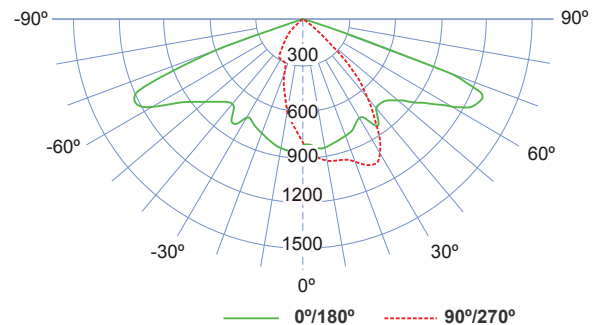




MN - PS




**Power:** 50-250W  
**Mains voltage:** 220-240V / 50-60Hz  
**Power Factor:** >0.9  
**Luminous flux:** 5000-32500lm  
**Luminaire efficacy:** 100-130lm/W  
**CCT:** 2700-6000K  
**CRI:** > 80  
**Beam Angle:** 60 / 120 / 45x120 / 60x120°  
**Light Source:** Cree / Philips / Bridgelux / OSRAM/Epistar  
**Control gear:** Meanwell / Philips / Invention,Achi,Done  
**Dimming:** Dali / 5 steps / 0-10V  
**IP rating:** IP65  
**Color:** Silver  
**Life time:** 50,000-100,000hrs  
**Operating Temperature:** -40 ~ +45  
**Storage Temperature:** -20 ~ +65  
**Dimension:**  
 PS150.L425 x W325 x H200  
 PS200.L455 x W325 x H200  
 PS300.L590 x W325 x H200  
 PS400.L700 x W335 x H205


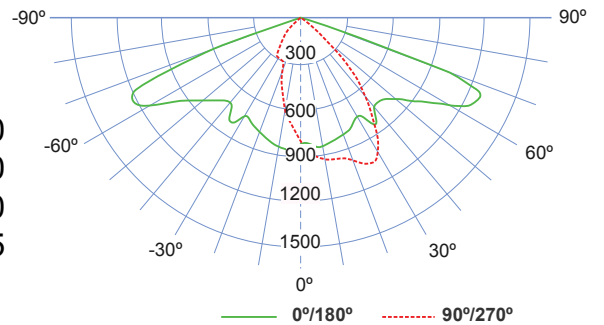




MN - DX




Power:	100-250W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	5000-32500lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 45x120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / OSRAM / Epistar
Control gear:	Meanwell / Philips / Invention / DONE
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65

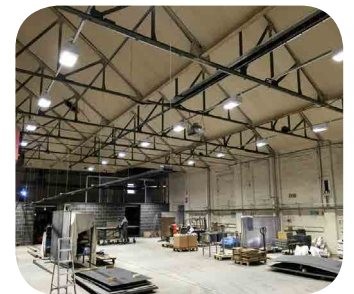






MN - L 23




Power:	50-200W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	5000-32500lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 45x120 / 60x120°
Light Source:	Cree / Philips / Bridgelux /Epistar
Control gear:	Meanwell / Philips / DONE
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65




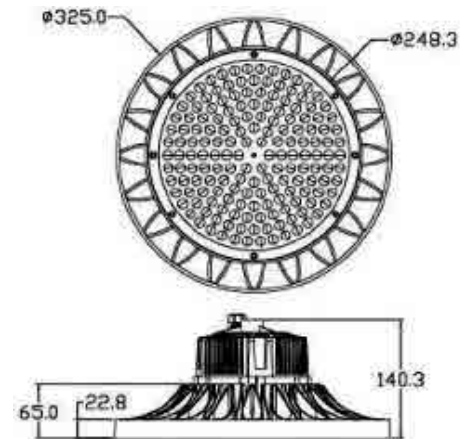




MN - L 24




Power:	100-250W
Mains voltage:	220-240V / 50-60Hz
Power Factor:	>0.9
Luminous flux:	5000-32500lm
Luminaire efficacy:	100-130lm/W
CCT:	2700-6000K
CRI:	> 80
Beam Angle:	60 / 120 / 45x120 / 60x120°
Light Source:	Cree / Philips / Bridgelux / Epistar
Control gear:	Meanwell / Philips / DONE
Dimming:	Dali / 5 steps / 0-10V
IP rating:	IP65
Color:	Silver
Life time:	50,000-100,000hrs
Operating Temperature:	-40 ~ +45
Storage Temperature:	-20 ~ +65


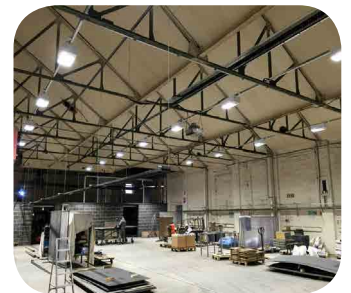


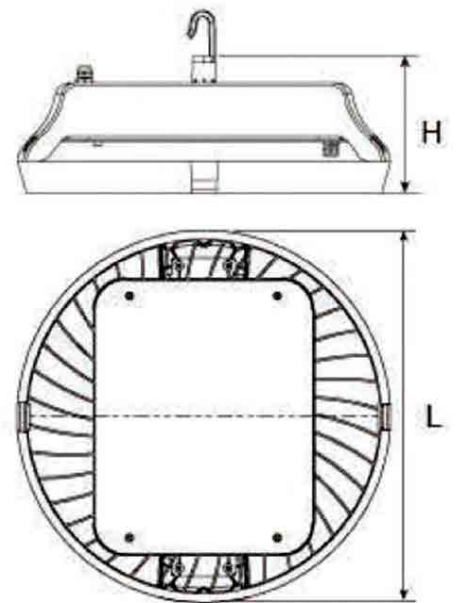




MM-ST-03



**Power:** 50-300W  
**Mains voltage:** 220-240V / 50-60Hz  
**Power Factor:** >0.9  
**Luminous flux:** 6000-26000lm  
**Luminaire efficacy:** 120-140lm/W  
**CCT:** 2700-6000K  
**CRI:** > 80  
**Beam Angle:** 60 / 120 / 45x120 / 60x120°  
**Light Source:** Philips / Bridgelux / Epistar  
**Control gear:** Meanwell / Philips / Done  
  
**Dimming:** Dali / 5 steps / 0-10V  
**IP rating:** IP65  
**Color:** Silver  
**Life time:** 50,000-100,000hrs  
**Operating Temperature:** -40 ~ +45  
**Storage Temperature:** -20 ~ +65  
**Dimension:** MM.L205 x W170 x H170  
 MM.L257 x W205 x H205  
 MM.L307 x W230 x H230

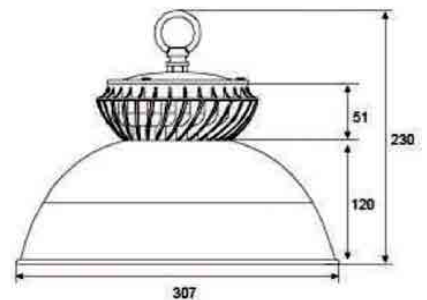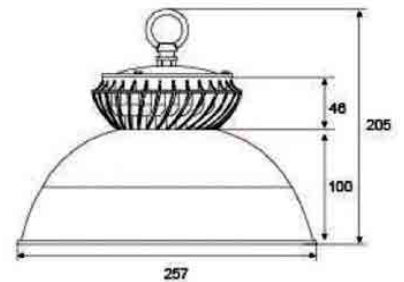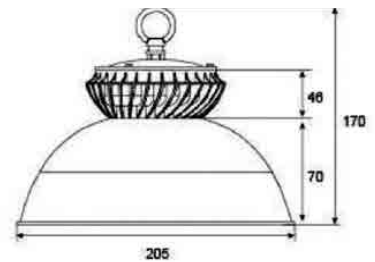

CÔNG TY TNHH SẢN XUẤT - THƯƠNG MẠI TBĐ VÀ  
**CHIẾU SÁNG ĐÔ THỊ MIỀN NAM**

Địa chỉ: 449D, QL1A, KP2, P. Linh Xuân , Q. Thủ Đức, TP.HCM, VN  
Website: [trudenchieusang.com](http://trudenchieusang.com) - [trudenchieusang.com.vn](http://trudenchieusang.com.vn)  
E-mail: [cotden.vn@gmail.com](mailto:cotden.vn@gmail.com) - [denchieusangvn@gmail.com](mailto:denchieusangvn@gmail.com)  
Điện thoại: 08.66600499 - 08.62840018 - Fax: 08.54037612  
Di động: 098 4567 468 - 0947 480 886

